
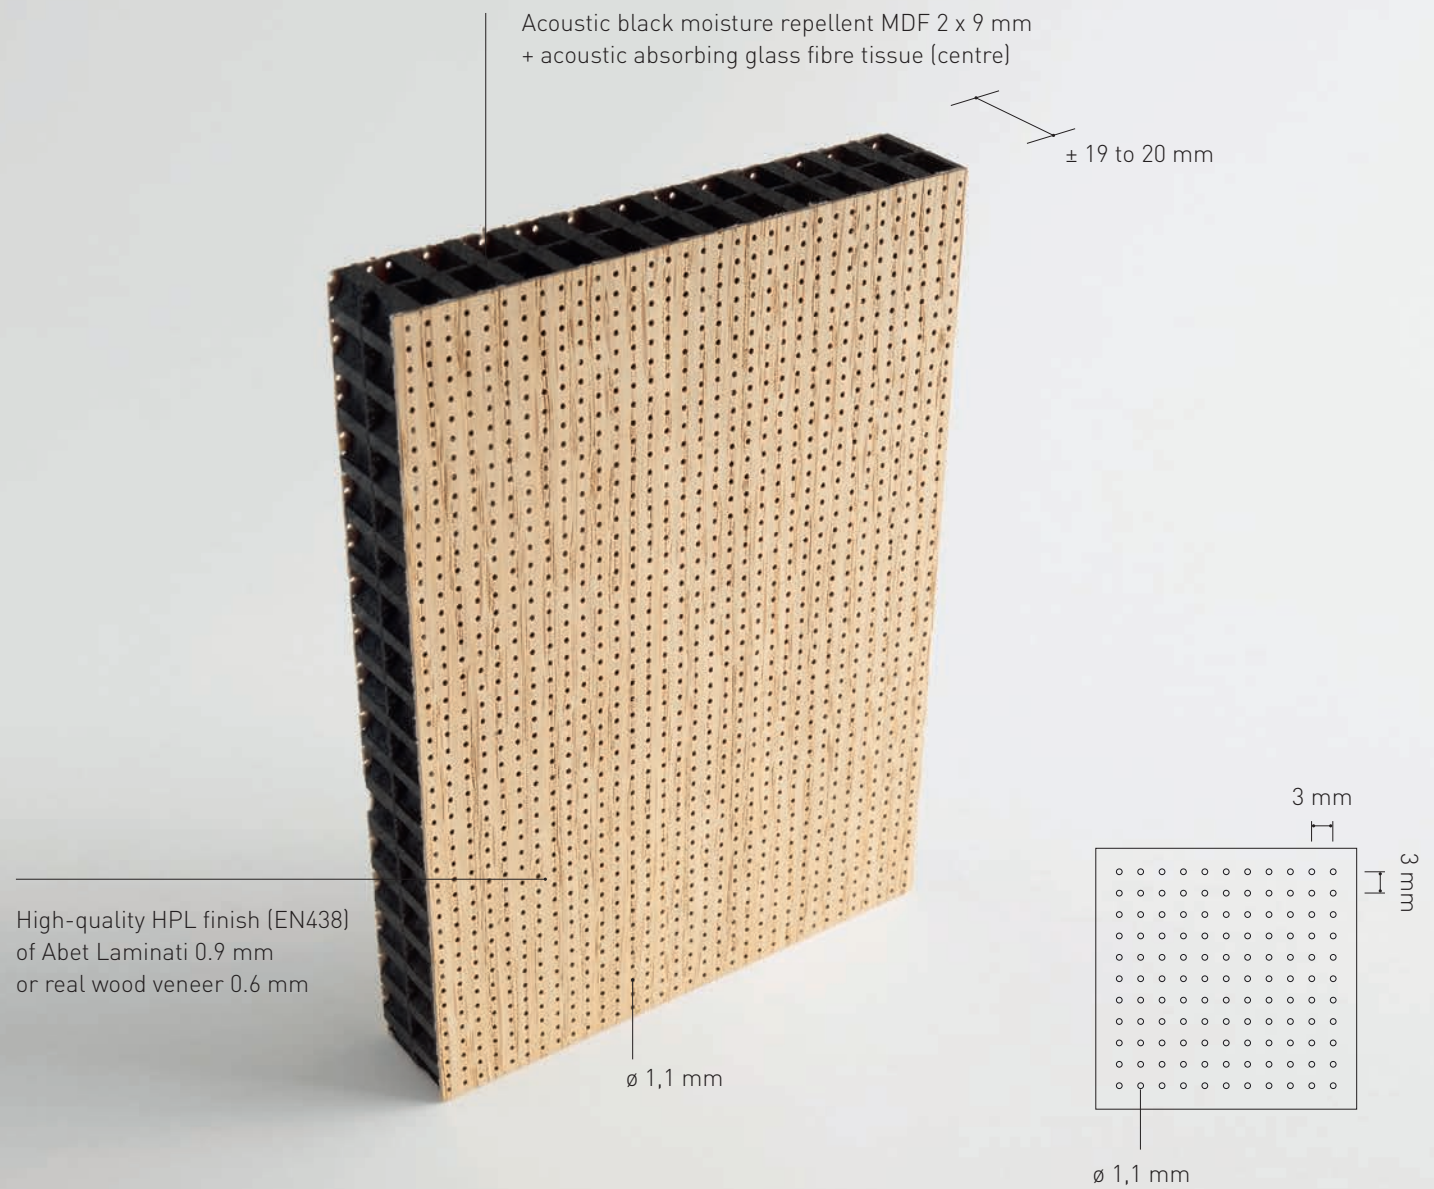


PRINT ACOUSTICS

your silent partner



ACOUSTIC — ARCHITECTURAL — AMAZING



INSTALLATION *see page 87*


TYPE M / ML / N / NL

Core

- > 3000x1270 mm
- > In black moisture repellent or fire retardant MDF with a non-perforated area around and at the centre of the panel (full edge not visible on visible side)

Two perforated areas in the core
(linear, 8/8/6 mm)

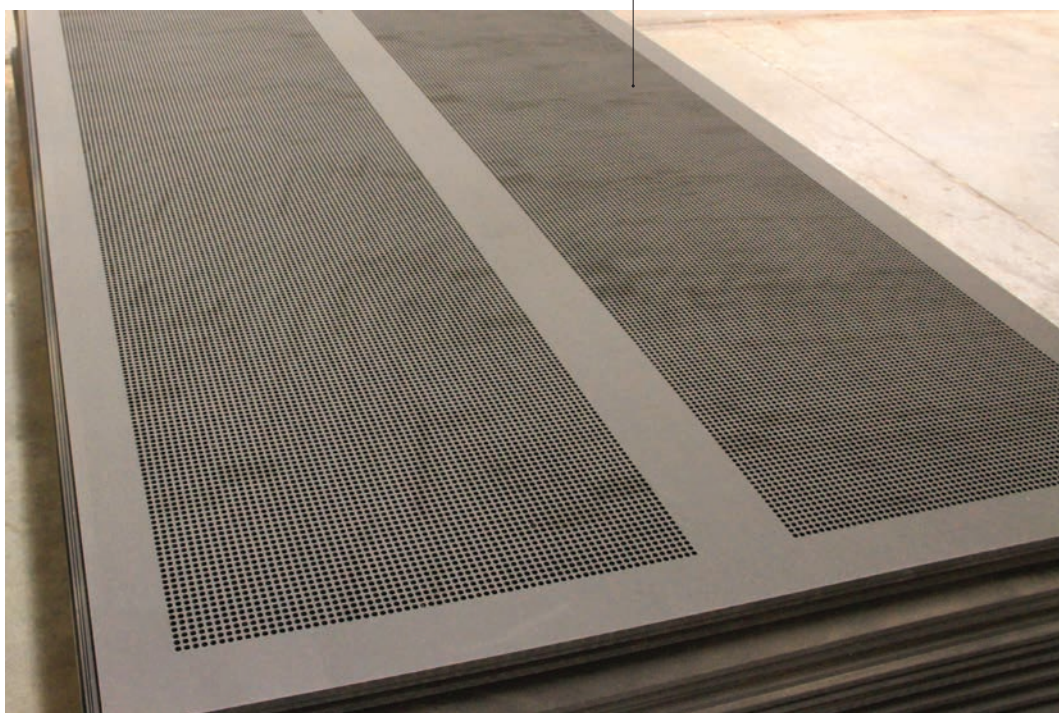


Perforated top layer with micro or nano perforations. Micro perforations standardly up to the edge of the panel. The perforations can differ slightly near the edge.

Full panel core dimensions

> 3000x1270 mm


Perforated area in the core
(linear 8/8/6 mm)

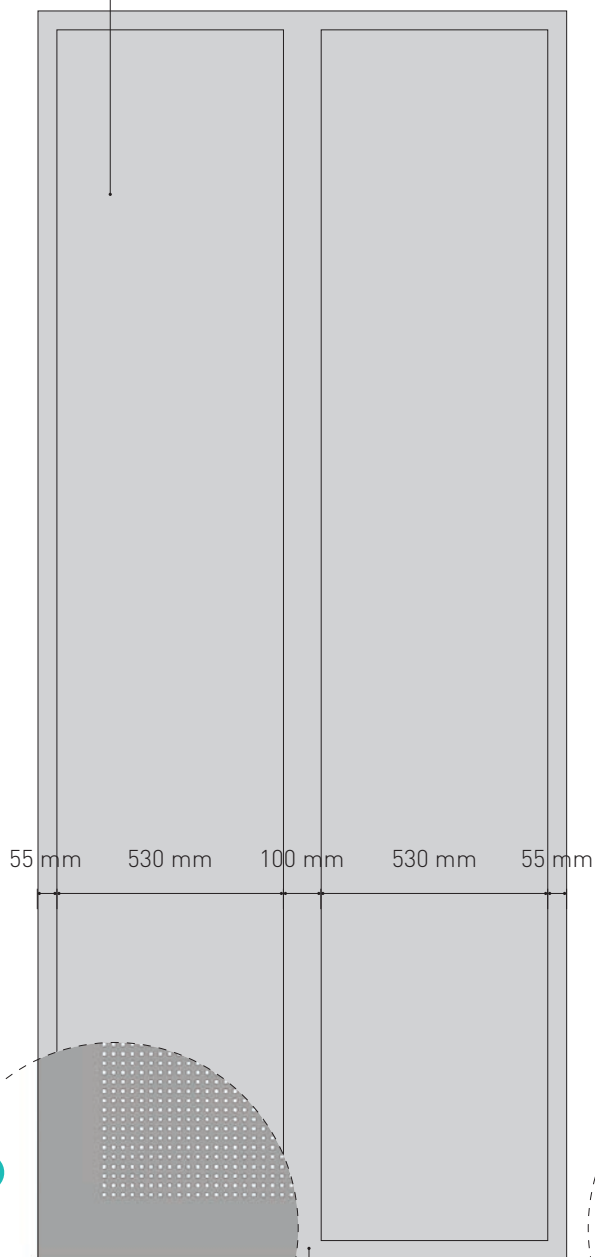

Non-perforated area
around and in the
centre of the panel.

Visible side of top layer of full panel

Perforated top layer with micro perforations
(linear, 3/3/1.1 mm) or nano perforations
(diagonally, 1.97/1.97/0.5 mm). Perforations
standardly up to the edge of the panel.

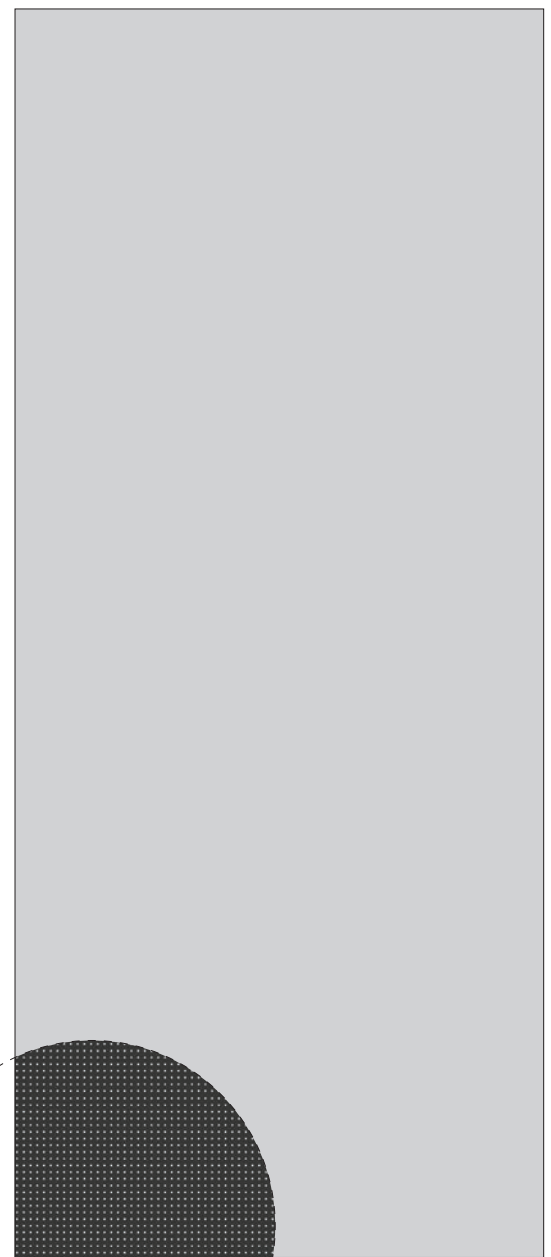

TYPE B, C HPL, C MX, M, ML, N, NL

Installation on a single or double wooden frame (ctc 640 mm for panels of 1280 mm / ctc 600 mm for panels of 1200 mm) can be done by means of invisible planks. These invisible planks are screwed onto the back of the panels and the acoustic absorbing panels are then hung onto the frame.

The openings of the wooden framework must be filled with a sound absorbing material (e.g. Rockwool or Primawool).

The four sides of the panel must always be supported by the framework. The short sides of two panels are mounted next to each other to a common underlying frame with a distance of 2 to 3 mm between them.



The short sides of two panels are mounted to a common underlying frame with a distance of 2 to 3 mm between them.

We advise you to leave a space at the top between the panel and the ceiling so as to enable you to join the two elements.

We advise you to leave a space of 2.5 mm per meter in height and width in order to allow the construction to expand.

Proposed installation patterns as well as our guidelines to store the panels can be found on Page 88. Our guidelines for corner and plinth details can be found on Page 90.


On request you can obtain specific installation guidelines and certificates for: walls with an expected increased impact (sports rooms, party rooms, etc.) according to standard ETAG 003 and EN 13,964 and for ceiling installation.

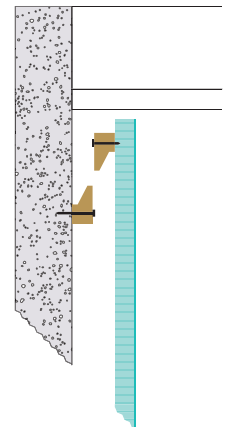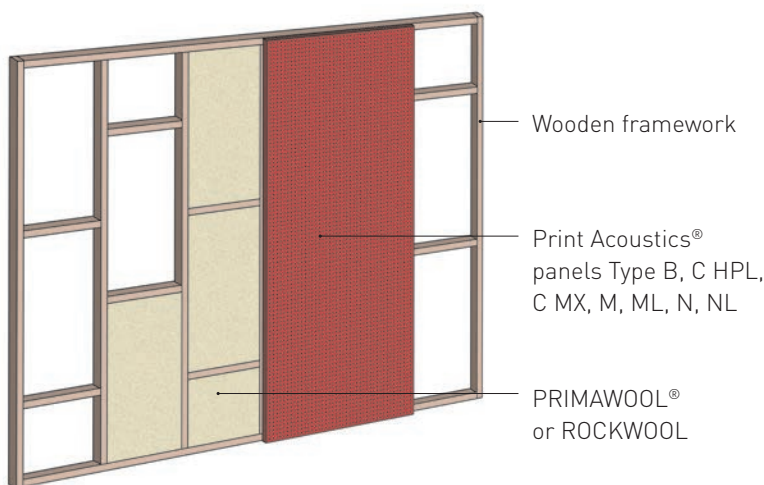

TEST SET-UP
IN LABORATORY:

**TOTAL THICKNESS
WALLS**
88/90 mm

**TOTAL THICKNESS
WALLS**
38/40 mm

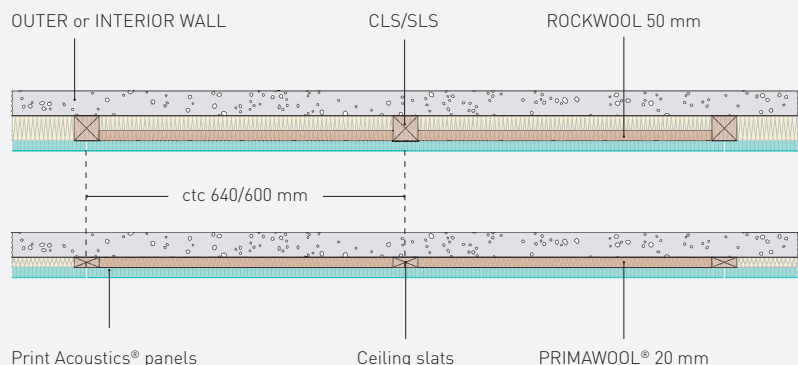



Print Acoustics is a TRIPLACO brand

Generaal Deprezstraat 2, 8530 Harelbeke - België

T +32 56 22 62 17 | F +32 56 22 98 15 | info@printacoustics.be | www.printacoustics.be